



A pressure monitoring port that has been integrated into the Innerlynx® assembly, will not jeopardize the integrity of the sealing capability, unlike other testing methods. APS Test Ports are used to test or monitor the operating pressure of an Innerlynx® application.

- 1/8" National Pipe Thread (NPT) nipple TIG welded to the head side
- Requires the use of a deep well socket to install
- Rated at 40 psig, tested at 92 feet of head pressure

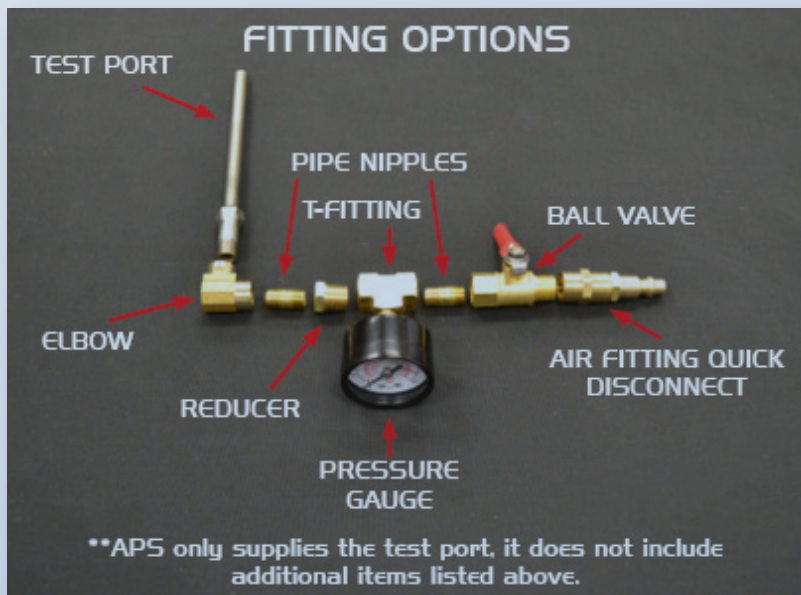

**FOR MORE INFORMATION
PLEASE CONTACT US
1-800-315-6009**

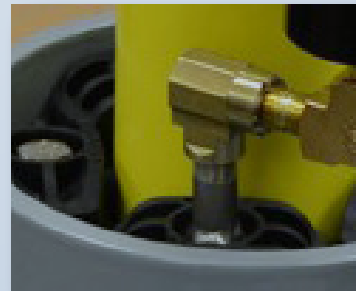