


Type A Shield Components:



We recommend using gloves during the installation

Step 1: Remove the Splash Arrestor® from the box and loosen the latch by turning the wing nut counter clockwise.

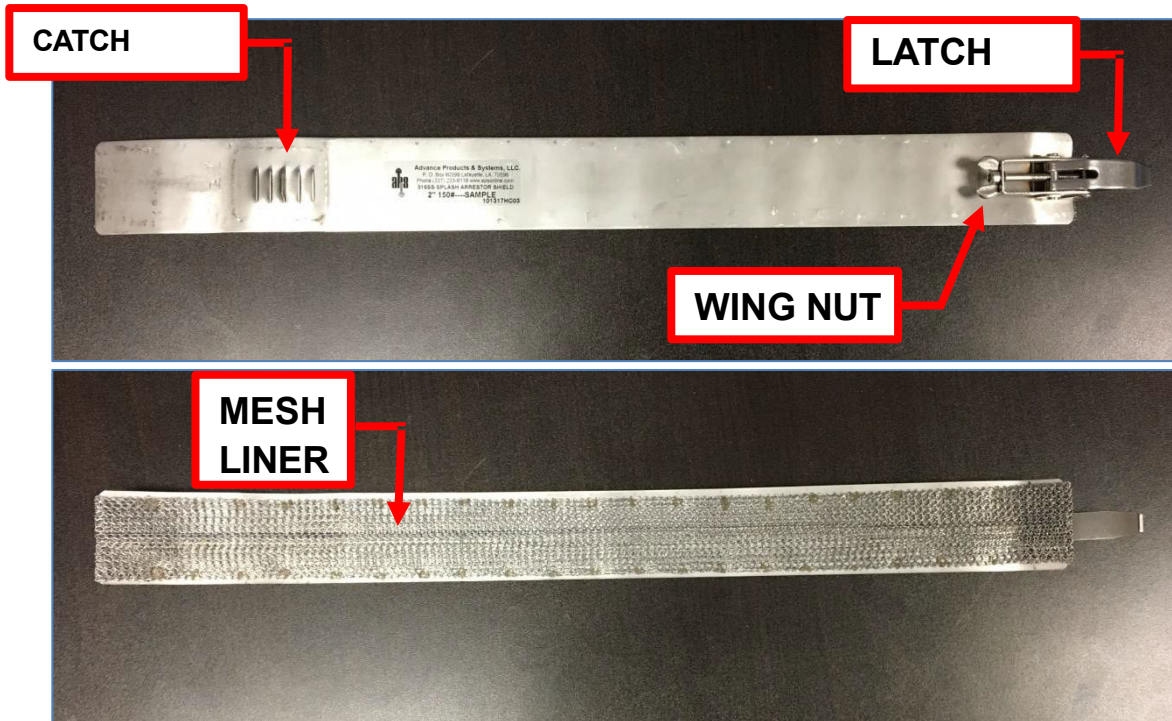

Step 2: Wrap the Splash Arrestor® around the flange with the mesh liner down and attach the latch to the catch plate. Start with the center slot and adjust if necessary.



Step 3: Pull back the latch and tighten it by turning the wing nut clockwise until fully secured and locked.



Installation Complete and Ready for Operation